


## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 35kV 100%, 345-mils Single Conductor Un-Filled Copper - Silicone Free

### DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of Copper Un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

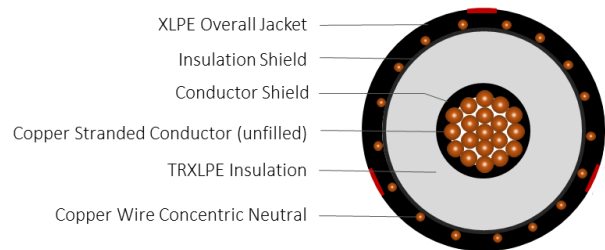

**SERIES E9MWT**

### CONSTRUCTION

<b>CONDUCTOR</b>	Annealed bare copper (unfilled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed solid bare copper wires Reduced wire numbers per ICEA P-45-482 calculations
<b>JACKET</b>	Cross-Linked Polyethylene (XLPE)
<b>PACKAGING</b>	Non-returnable reels

### STANDARDS (Compliance)

<b>PERFORMANCE</b>	AEIC CS8 ASTM B3 ASTM B8 ICEA P-45-482 ICEA S-94-649 UL 1072
--------------------	---

## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 35kV 100%, 345-mils Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG or kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Copper Concentric Neutrals (1/3 Neutral)	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs / Mft)
E9MWT-A61B01CA00	500	0.789	1.51	19 x 12AWG	0.080	1.93	2,885
E9MWT-4A1B01CA00	4/0	0.512	1.23	13 x 14AWG	0.055	1.57	1,510

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.