


## EPR/CTS/PVC Power, Type MV-105, 15kV 133% Single Conductor Un-Filled Copper - Silicone Free

### DESCRIPTION

The Medium Voltage, EPR/Cu Tape Shield/PVC, Type MV-105 Cables that consist of a copper un-filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket. These cables are used in industrial power circuits.

### APPLICATIONS

- Primary installations include cable tray, outdoor locations, in conduit, duct, free air, and raceways.
- Direct buried if installed in a system with a ground conductors that is in close proximity and conforms with NEC 250.4 (A)(5).
- In wet or dry locations. Rated 105°C wet or dry.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC.
- Excellent sunlight resistance.
- For CT use for 1/0AWG and larger, per UL 1072.
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

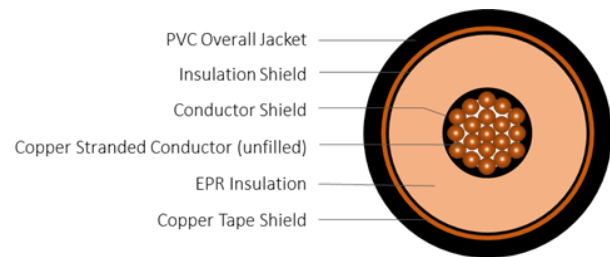

**SERIES G15BEP**

### CONSTRUCTION

|                          |                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CONDUCTOR</b>         | Fully annealed bare copper (unfilled)<br>Class B compressed strand                                                                                                                 |
| <b>STRAND SHIELD</b>     | Extruded thermoset semi-conducting polymer over the conductor                                                                                                                      |
| <b>INSULATION</b>        | Ethylene propylene rubber (EPR)                                                                                                                                                    |
| <b>INSULATION SHIELD</b> | Extruded thermoset semi-conducting polymer over the insulation                                                                                                                     |
| <b>SHIELD</b>            | 5 mil annealed copper tape helically applied with approximately 25% overlap                                                                                                        |
| <b>JACKET</b>            | Black Polyvinyl Chloride (PVC)                                                                                                                                                     |
| <b>JACKET MARKING</b>    | 00000 FT LS CABLE XXXXKMIL (or<br>AWG) CU 1/C 15KV 133%<br>INSUL LEVEL 220 MILS EPR/PVC JKT<br>MV-105 FOR CT USE (UL) SUN RES<br>MADE IN USA MM/DD/YYYY<br>(LIGHTNING BOLT SYMBOL) |
| <b>PACKING</b>           | Non-returnable wood reels                                                                                                                                                          |

### STANDARDS (Compliance)

|                    |                                                                                    |
|--------------------|------------------------------------------------------------------------------------|
| <b>PERFORMANCE</b> | AIEC CS8<br>ASTM B3<br>ASTM B8<br>ICEA S-93-639<br>ICEA S-97-682<br>UL 1072<br>NEC |
| <b>OTHER</b>       | EPA 40 CFR, Part 261<br>OSHA                                                       |

## EPR/CTS/PVC Power, Type MV-105, 15kV 133% Single Conductor Un-Filled Copper - Silicone Free

| SPECIFICATIONS        |                            |                         |                          |                       |                  |                          |
|-----------------------|----------------------------|-------------------------|--------------------------|-----------------------|------------------|--------------------------|
| Part Number           | Conductor Size (AWG/kcmil) | Conductor Diameter (in) | Insulation Diameter (in) | Jacket Thickness (in) | Approx. O.D (in) | Approx. Weight (lbs/kft) |
| G15BEP-A2CB-1CZ-T5Z-Z | 1250                       | 1.250                   | 1.79                     | 0.105                 | 2.10             | 5,035                    |

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.