


EPR/CN/LLDPE Power, MV-90 Type Primary UD, 15kV 133% Single Conductor Filled Aluminum - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of an aluminum filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a Linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

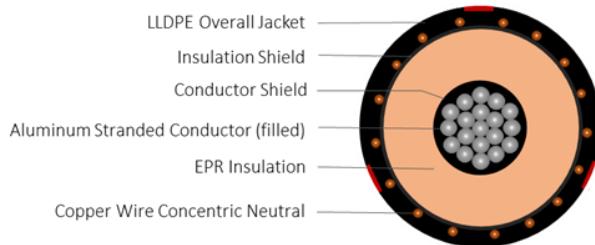

SERIES U15BEL

CONSTRUCTION

CONDUCTOR	Aluminum 1350 (filled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires
JACKET	Linear low-density polyethylene (LLDPE)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) FS AL 1/C 15KV 133% INSUL LEVEL 220 MILS EPR 'No. of Neutral' X # 'Neutral size' LLDPE JKT MV-90 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

CONDUCTOR	AEIC CS8
STRAND SHIELD	ASTM B3
INSULATION	ASTM B230
INSULATION SHIELD	ASTM B231
SHIELD	ICEA S-94-649
JACKET	ICEA T-31-610
JACKET MARKING	UL 1072
PACKING	RUS U1
OTHER	OSHA

**EPR/CN/LLDPE Power, MV-90 Type Primary UD, 15kV 133%
Single Conductor Filled Aluminum - Silicone Free****SPECIFICATIONS**

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U15BEL-75FB-1CZ-R3T-Z	750kcmil	0.968	1.50	15 x 10AWG (1/3N)	0.075	1.97	2,150

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.