


TR-XLPE/CN/LLDPE Power, Type MV-90, Primary UD, 35kV 100% Single Conductor Filled Aluminum - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of an aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

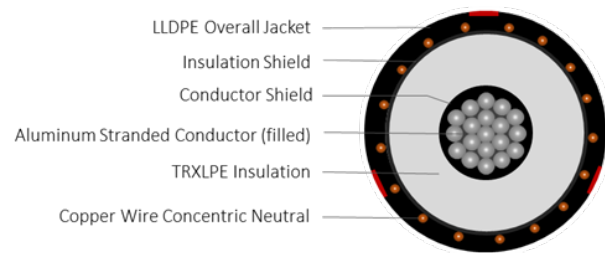

SERIES U35ATL

CONSTRUCTION

CONDUCTOR	Aluminum 1350 (filled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires
JACKET	Linear low-density polyethylene (LLDPE)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) FS AL 1/C 35KV 100% INSUL LEVEL 345 MILS TRXLPE 'No. of Neutral' X # 'Neutral size' LLDPE JKT MV-90 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA S-94-649 ICEA T-31-610 UL 1072
OTHER	OSHA

TR-XLPE/CN/LLDPE Power, Type MV-90, Primary UD, 35kV 100% Single Conductor Filled Aluminum - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
1/6 Reduced Neutral							
U35ATL-50FB-1CZ-R6Z-Z	500	0.789	1.56	13 x 14	0.075	1.96	1,615
1/5 Reduced Neutral							
U35ATL-A1FB-1CZ-R5Z-Z	1000	1.117	1.91	30 x 14	0.075	2.33	2,595
1/2 Reduced Neutral							
U35ATL-4AFB-1CZ-R2Z-Z	4/0	0.512	1.27	16 x 14	0.050	1.62	1,115

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.