


TR-XLPE/CN/XLPE Power, MV-105 Type Primary UD, 35kV 100% Single Conductor Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of a copper filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a moisture blocked cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

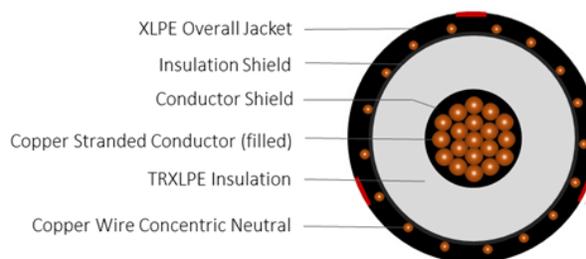

SERIES U35ATX

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (filled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires. Reduced wire number per ICEA P-45-482 calculations
JACKET	Moisture blocked Cross-linked Polyethylene (XLPE)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) FS CU 1/C 35KV 100% INSUL LEVEL 345 MILS TRXLPE 'No. of Neutral' X # 'Neutral size' MB XLPE JKT MV-105 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B8 ICEA S-94-649 ICEA T-34-664 UL 1072
OTHER	OSHA

TR-XLPE/CN/XLPE Power, MV-105 Type Primary UD, 35kV 100% Single Conductor Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U35ATX-4ADB-1CZ-R3Z-M	4/0	0.512	1.27	13 x 14 AWG (1/3N)	0.050	1.62	1,525
U35ATX-50DB-1CZ-R3Z-M	500	0.789	1.56	28 x 14 AWG (1/3N)	0.075	1.96	2,840
U35ATX-A1DB-1CZ-R3Z-M	1000	1.117	1.91	24 x 10 AWG (1/3N)	0.075	2.41	5,160
U35ATX-A2DB-1CZ-R3Z-M	1250	1.250	2.05	28 x 10 AWG (1/3N)	0.075	2.56	6,160

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.