


TR-XLPE/CN/XLPE Power, Type MV-105, Primary UD, 35kV 100% Single Conductor Filled Aluminum - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of an aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

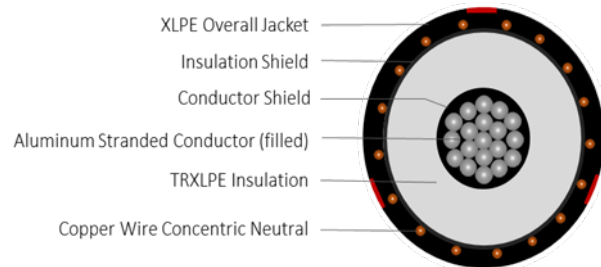

SERIES U35ATX

CONSTRUCTION

| | |
|--------------------------|--|
| CONDUCTOR | Aluminum 1350 (filled) Class B compressed strand |
| STRAND SHIELD | Extruded thermoset semi-conducting polymer over the conductor |
| INSULATION | Tree-retardant cross-linked polyethylene (TR-XLPE) |
| INSULATION SHIELD | Extruded thermoset semi-conducting polymer over the insulation |
| SHIELD | Helically applied, annealed, solid bare copper wires |
| JACKET | Cross-linked polyethylene (XLPE) |
| JACKET MARKING | 00000 FT LS CABLE XXXKCMIL (or AWG) FS AL 1/C 35KV 100% INSUL LEVEL 345 MILS TRXLPE 'No. of Neutral' X # 'Neutral size' XLPE JKT MV-105 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL) |
| PACKING | Non-returnable wood reels |

STANDARDS (Compliance)

| | |
|--------------------|--|
| PERFORMANCE | AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA S-94-649 ICEA T-31-610 UL 1072 |
| OTHER | OSHA |

TR-XLPE/CN/XLPE Power, Type MV-105, Primary UD, 35kV 100% Single Conductor Filled Aluminum - Silicone Free

| SPECIFICATIONS | | | | | | | |
|-----------------------|----------------------------|-------------------------|--------------------------|--------------------------------|-----------------------|------------------|--------------------------|
| Part Number | Conductor Size (AWG/kcmil) | Conductor Diameter (in) | Insulation Diameter (in) | Concentric Neutral (No. x AWG) | Jacket Thickness (in) | Approx. O.D (in) | Approx. Weight (lbs/kft) |
| 1/6 Reduced Neutral | | | | | | | |
| U35ATX-50FB-1CZ-R6Z-Z | 500 | 0.789 | 1.56 | 9 x 14 | 0.075 | 1.96 | 1,565 |
| 1/5 Reduced Neutral | | | | | | | |
| U35ATX-A1FB-1CZ-R5Z-Z | 1000 | 1.117 | 1.91 | 21 x 14 | 0.075 | 2.33 | 2,485 |
| 1/2 Reduced Neutral | | | | | | | |
| U35ATX-4AFB-1CZ-R2Z-Z | 4/0 | 0.512 | 1.27 | 12 x 14 | 0.050 | 1.62 | 1,060 |

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.