


EPR/CN/LLDPE Power, MV-90 Type Primary UD, 35kV 133% Single Conductor Un-Filled Aluminum - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of an aluminum un-filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

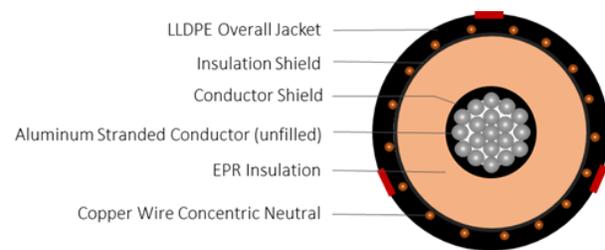

SERIES U35BEL

CONSTRUCTION

| | |
|--------------------------|--|
| CONDUCTOR | Aluminum 1350 (unfilled) Class B compressed strand |
| STRAND SHIELD | Extruded thermoset semi-conducting polymer over the conductor |
| INSULATION | Ethylene propylene rubber (EPR) |
| INSULATION SHIELD | Extruded thermoset semi-conducting polymer over the insulation |
| SHIELD | Helically applied, annealed, solid bare copper wires |
| JACKET | Linear low-density polyethylene (LLDPE) |
| JACKET MARKING | 00000 FT LS CABLE XXXKCMIL (or AWG) AL 1/C 35KV 133% INSUL LEVEL 420 MILS EPR 'No. of Neutral' X # 'Neutral size' LLDPE JKT MV-90 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL) |
| PACKING | Non-returnable wood reels |

STANDARDS (Compliance)

| | |
|--------------------|---|
| PERFORMANCE | AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA S-94-649 UL 1072 |
| OTHER | OSHA |

EPR/CN/LLDPE Power, MV-90 Type Primary UD, 35kV 133% Single Conductor Un-Filled Aluminum - Silicone Free

| SPECIFICATIONS | | | | | | | |
|-----------------------|----------------------------|-------------------------|--------------------------|--------------------------------|-----------------------|------------------|--------------------------|
| Part Number | Conductor Size (AWG/kcmil) | Conductor Diameter (in) | Insulation Diameter (in) | Concentric Neutral (No. x AWG) | Jacket Thickness (in) | Approx. O.D (in) | Approx. Weight (lbs/kft) |
| U35BEL-A2AB-1CZ-R3Z-Z | 1250 ¹ | 1.250 | 2.20 | 25 x 10AWG (1/3N) | 0.075 | 2.71 | 3,910 |

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.
¹1250 KCMIL may have 61 wires subject to mutual agreement between the manufacturer and customer per ASTM B231 .