


EPR/CN/XLPE Power, MV-105 Type Primary UD, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of a copper un-filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

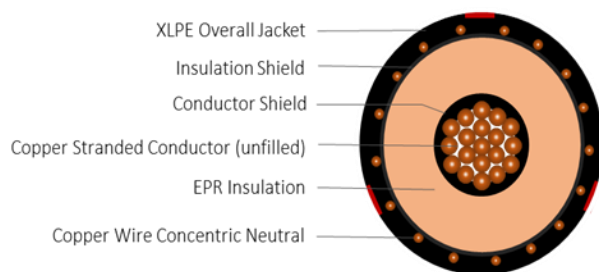

SERIES U35BEX

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (unfilled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires
JACKET	Cross-linked Polyethylene (XLPE)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) CU 1/C 35KV 133% INSUL LEVEL 420 MILS EPR 'No. of Neutral' X # 'Neutral size' XLPE JKT MV-105 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B8 ICEA S-94-649 UL 1072
OTHER	OSHA

EPR/CN/XLPE Power, MV-105 Type Primary UD, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U35BEX-1ACB-1CZ-R3Z-Z	1/0	0.362	1.27	7 x 14AWG (1/3N)	0.050	1.62	1,275
U35BEX-2ACB-1CZ-R3Z-Z	2/0	0.405	1.31	8 x 14AWG (1/3N)	0.050	1.66	1,410
U35BEX-3ACB-1CZ-R3Z-Z	3/0	0.456	1.37	10 x 14AWG (1/3N)	0.050	1.71	1,590
U35BEX-4ACB-1CZ-R3Z-Z	4/0	0.512	1.42	13 x 14AWG (1/3N)	0.075	1.82	1,865
U35BEX-25CB-1CZ-R3Z-Z	250	0.558	1.48	15 x 14AWG (1/3N)	0.075	1.88	2,060
U35BEX-35CB-1CZ-R3Z-Z	350	0.661	1.58	21 x 14AWG(1/3N)	0.075	1.98	2,530

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.