


EPR/CTS/PVC Power, Type MV-105, 15kV 133%, 220-MILS 3 Conductor Filled Copper - Silicone Free

DESCRIPTION

The 3 Conductor MV-105 Power cables that consist of an copper filled conductors, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket. These cables are used in industrial power circuits.

APPLICATIONS

- In conduit, duct, free air, direct burial and raceways, primary installations include cable trays, and outdoor locations.
- In wet or dry locations.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC.
- Excellent sunlight resistance.
- For CT per UL 1072.
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

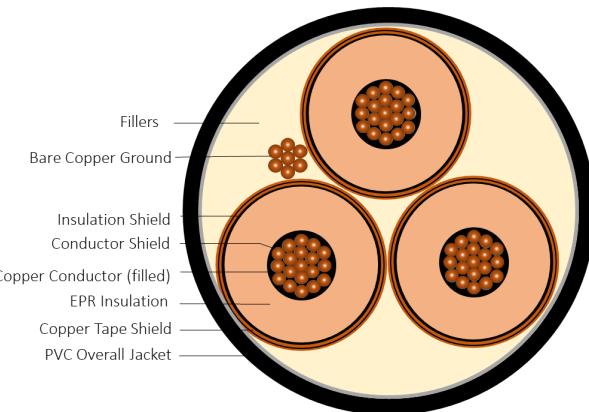

SERIES G15BEP

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (filled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
PHASE ID	Color ribbons in each phase (black-red-blue)
SHIELD	5 mil annealed copper tape helically applied with approx. 25% overlap
GROUND	Uninsulated bare copper ground
JACKET	Black Polyvinyl Chloride (PVC)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) FS CU 3/C WITH GND 15KV 133% INSUL LEVEL 220 MILS EPR/ PVC JKT MV-105 FOR CT USE (UL) SUN RES DIR BUR MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

CONDUCTOR	AEIC CS8 ASTM B3 ASTM B8
STRAND SHIELD	ICEA S-93-639 ICEA S-97-682
INSULATION	ICEA T-31-610 UL 1072
INSULATION SHIELD	NEC
PHASE ID	EPA 40 CFR, Part 261 OSHA
SHIELD	
GROUND	
JACKET	
JACKET MARKING	
PACKING	

PERFORMANCE	
OTHER	EPA 40 CFR, Part 261 OSHA

EPR/CTS/PVC Power, Type MV-105, 15kV 133%, 220-MILS**3 Conductor Filled Copper - Silicone Free****SPECIFICATIONS**

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Ground Size (AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G15BEP-2ADB-3CG-T5Z-Z	2/0	0.405	0.90	4	0.105	2.38	3,180
G15BEP-4ADB-3CG-T5Z-Z	4/0	0.512	1.01	3	0.105	2.62	4,200
G15BEP-50DB-3CG-T5Z-Z	500	0.789	1.30	1	0.130	3.30	7,845
G15BEP-75DB-3CG-T5Z-Z	750	0.968	1.50	1/0	0.130	3.71	10,755

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.