


EPR/CTS/PVC Power, Type MV-105, 35kV 133% Single Conductor Un-Filled Aluminum - Silicone Free

DESCRIPTION

The Medium Voltage, EPR/Cu Tape Shield/PVC, Type MV-105 Cables that consist of an aluminum un-filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket. These cables are used in industrial power circuits.

APPLICATIONS

- Primary installations include cable tray, outdoor locations, in conduit, duct, free air, and raceways.
- Direct buried if installed in a system with a ground conductors that is in close proximity and conforms with NEC 250.4 (A)(5).
- In wet or dry locations. Rated 105°C wet or dry.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC.
- Excellent sunlight resistance.
- For CT use for 1/0AWG and larger, per UL 1072.
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

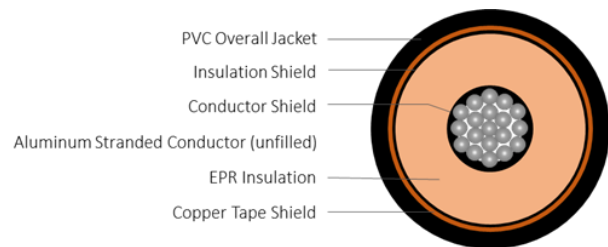

SERIES G35BEP

CONSTRUCTION

CONDUCTOR	Aluminum 1350 (unfilled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	5 mil annealed copper tape helically applied with approximately 25% overlap
JACKET	Black Polyvinyl Chloride (PVC)
JACKET MARKING	00000 FT LS CABLE XXXXCMIL (or AWG) AL 1/C 35KV 133% INSUL LEVEL 420 MILS EPR/PVC JKT MV-105 FOR CT USE (UL) SUN RES MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B230 ASTM B231 ICEA S-93-639 ICEA S-97-682 UL 1072 NEC
OTHER	EPA 40 CFR, Part 261 OSHA

EPR/CTS/PVC Power, Type MV-105, 35kV 133% Single Conductor Un-Filled Aluminum - Silicone Free

SPECIFICATIONS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G35BEP-4AAB-1CZ-T5Z-Z	4/0	0.512	1.42	0.075	1.66	1,280
G35BEP-50AB-1CZ-T5Z-Z	500	0.789	1.71	0.105	2.02	1,955
G35BEP-75AB-1CZ-T5Z-Z	750	0.968	1.91	0.105	2.22	2,390
G35BEP-A1AB-1CZ-T5Z-Z	1000	1.117	2.06	0.105	2.37	2,780

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.

ELECTRICAL DATA			
Part Number	Conductor Size (AWG/kcmil)	Nom. DC Resistance at 25°C (Ω/1000ft.)	Nom. AC Resistance at 25°C (Ω/1000ft.)
G35BEP-4AAB-1CZ-T5Z-Z	4/0	0.0836	0.0838
G35BEP-50AB-1CZ-T5Z-Z	500	0.0354	0.0360
G35BEP-75AB-1CZ-T5Z-Z	750	0.0236	0.0244
G35BEP-A1AB-1CZ-T5Z-Z	1000	0.0177	0.0188

Resistance values specified are nominal and subject to industry standards.