


EPR/CTS/PVC Power, Type MV-105, 5kV 133%/8kV 100%, 15kV 133%, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage, EPR/Cu Tape Shield/PVC, Type MV-105 Cables that consist of Copper un-filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket. These cables are used in industrial power circuits.

APPLICATIONS

- Primary installations include cable tray, outdoor locations, in conduit, duct, free air, and raceways.
- Direct buried if installed in a system with a ground conductors that is in close proximity and conforms with NEC 250.4 (A)(5).
- In wet or dry locations. Rated 105°C wet or dry.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC.
- Excellent sunlight resistance.
- For CT use for 1/0AWG and larger, per UL 1072.
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

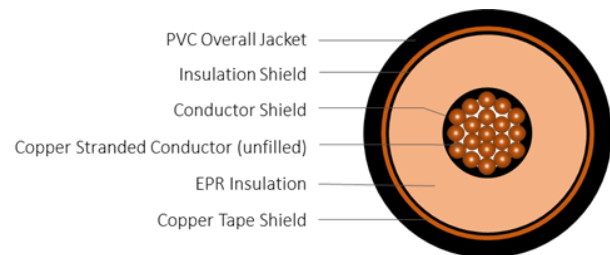

SERIES GBEP**

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (unfilled) Class B Strand Compact
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	5 mil annealed copper tape helically applied with approximately 25% overlap
JACKET	Black Polyvinyl Chloride (PVC)
JACKET MARKING	00000 FT LS CABLE XXXXCMIL (or AWG) CMPCT CU 1/C *'VOLTAGE PERCENTAGE' INSUL LEVEL 115 MILS EPR/PVC JKT MV-105 FOR CT USE (UL) SUN RES MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AIEC CS8 ASTM B3 ASTM B496 ICEA S-93-639 ICEA S-97-682 UL 1072 NEC
OTHER	EPA 40 CFR, Part 261 OSHA

* VOLTAGE PERCENTAGE: 5kV 133% / 8kV 100%, 15kV 133% or 35kV 133%

EPR/CTS/PVC Power, Type MV-105, 5kV 133%/8kV 100%

Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G5KBEP-4ACT-1CZ-T5Z-Z	4/0	0.475	0.77	0.075	1.01	1,035

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.

EPR/CTS/PVC Power, Type MV-105, 15kV 133%

Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G15BEP-25CT-1CZ-T5Z-Z	250	0.520	1.03	0.075	1.27	1,380

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.

EPR/CTS/PVC Power, Type MV-105, 35kV 133%

Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G35BEP-2ACT-1CZ-T5Z-Z	2/0	0.376	1.28	0.075	1.53	1,360

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.