


EPR/CN/XLPE Power, MV-105 Type Primary UD, 15kV 133% Single Conductor Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of a copper filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

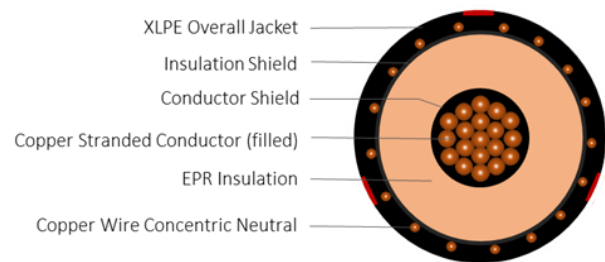

SERIES U15BEX

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (filled) Class B compact strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires ,Reduced wire numbers per ICEA P-45-482 calculations
JACKET	Cross-linked polyethylene (XLPE)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) FS CMPCT CU 1/C 15KV 133% INSUL LEVEL 220 MILS EPR 'No. of Neutral' X # 'Neutral size' XLPE JKT MV-105 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B496 ICEA S-94-649 ICEA T-31-610 UL 1072
OTHER	OSHA

EPR/CN/XLPE Power, MV-105 Type Primary UD, 15kV 133% Single Conductor Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U15BEX-50DB-1CZ-R6Z-Z	500	0.789	1.30	14 x 14 AWG (1/6N)	0.050	1.65	2,410
U15BEX-75DB-1CZ-R6Z-Z	750	0.968	1.50	21 x 14 AWG (1/6N)	0.075	1.89	3,430
U15BEX-A1DB-1CZ-R6Z-Z	1000	1.117	1.65	28 x 14 AWG (1/6N)	0.075	2.08	4,415

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.