


## TR-XLPE/CN/LLDPE Power, Type MV-90, Primary UD, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

### DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of a copper un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

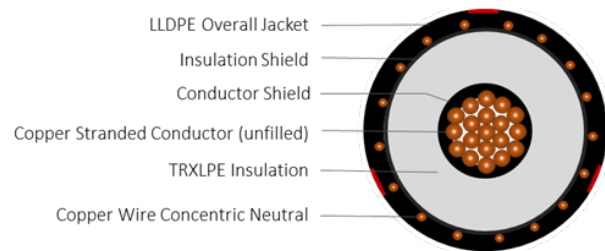

### CONSTRUCTION

<b>CONDUCTOR</b>	Fully annealed bare copper (unfilled) Class B compressed strand
<b>STRAND SHIELD</b>	Extruded thermoset semi-conducting polymer over the conductor
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Extruded thermoset semi-conducting polymer over the insulation
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires
<b>JACKET</b>	Linear low-density polyethylene (LLDPE)
<b>JACKET MARKING</b>	00000 FT LS CABLE XXXKCMIL (or AWG) CU 1/C 35KV 133% INSUL LEVEL 420 MILS TRXLPE 'No. of Neutral' X # 'Neutral size' LLDPE JKT MV-90 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
<b>PACKING</b>	Non-returnable wood reels

### STANDARDS (Compliance)

<b>PERFORMANCE</b>	AEIC CS8 ASTM B3 ASTM B8 ICEA S-94-649 UL 1072
<b>OTHER</b>	OSHA

## TR-XLPE/CN/LLDPE Power, Type MV-90, Primary UD, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U35BTL-25CB-1CZ-R3Z-Z	250	0.558	1.48	21 x 14 (1/3N)	0.075	1.88	1,995

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.